

4 Channel Connector

**4K
Ready**

High Quality Transmission

Four channel connection to transmit 4K Ultra High Definition signals.

Quick & Easy

Our new locking system is designed to plug and unplug the four channel cable in few seconds. The operation is faster than four traditional cables.

Solid & Reliable

We build our cables with high quality materials in order to provide the best connection possible between your 4K devices. Whether you need it in studio or during outdoor broadcasting, our cable is solid, flexible and resistant to fit many situations.



- 4 x 3G SDI's 4K signals with one connector and one cable.
- Quick 4 x 75 Ohms Connector Unit which can be plugged in one time.
- Easy "Push, Pull & Lock" system.
- Compact, Solid and Lightweight, suitable for outdoor broadcasting.

The new 4K connector by CANARE is one of our latest innovations in the broadcast field.

Today, the technology features the possibility to reach ultra high quality video signals. The need for a proper and convenient transmission is obvious as the quality standards have been raised to an upper level.

Canare created a cable which includes four channels and a brand new 4K connector, allowing to be plugged with ease and efficiency.

Thanks to its 4 in 1 connector, it enables the transmission of 4 x 3G-SDI's 4K signals with only one cable. The flexibility of the V4-2.5CHW cable makes it easier for mobile use.



Based on our DIN1.0/2.3 connector, the new 4 channel connector uses a similar locking system called "Push, Pull & Lock". Plug and push the connector to secure the connection. A "click" sound is heard when it is locked.

To unplug the connector, simply slide the ring backward to disengage the locking system and gently pull the whole connector out of the outlet.

The benefits of such a cable are the lightweight, the rapidity and easiness of the connection and the reliability of the material used. This is designed for professional applications, both fixed and mobile use, delivering a high performance at any time.

Specifications

| | MDM / MDF – V4C25HW | MDF – V4JRU |
|--------------------------------|------------------------------|------------------------|
| Compatibility | | DIN 1.0/2.3 Compatible |
| Voltage Proof | AC 750 Volt 1mn | |
| Return Loss (3Ghz) | 20 dB or more | 26 dB or more |
| Cable Connecting Force | 300 N or more | |
| Strength of Coupling Mechanism | 105 N 1mn | 50 N 1mn : 90° Bending |
| Repeated Mechanical Operations | 1500 Times | |
| Tools | TCD – 253F Spanner 21, 20 | |

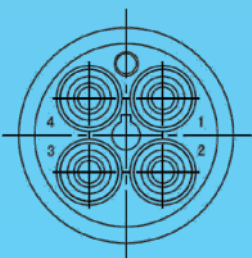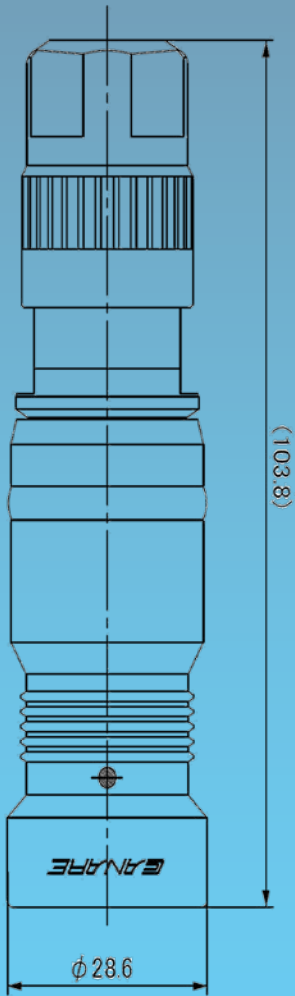

MDF-V4JRU

MDF-V4C25HW

MDM-V4C25HW

